

AIR HANDLING UNIT

AHU for all applications

Designed to conform to standards

EN 13053 and EN 1886

For all service sector, industry and healthcare applications



39CP

Air flow: 1000 to 30,000m³/h

Air handling unit: 39CP

The new range of 39CP air handling units is the latest generation of AHUs developed to meet the EN 1886 and EN13053 standards, integrating the most innovative components (filters, recovery units, fans, electric motors, etc.).

This range has been designed to meet rigorous standards and stringent environmental requirements. As confirmation of its quality processes, the production facility has received certifications in the following standards: ISO 9001, ISO14001, ISO18001.

The 39CP range has EUROVENT AHU programme certification. This generation has been designed to meet these criteria, providing a high level of classification, and ensuring it is suited to all types of application.

The range was developed by the European Air Side research and test center. It was designed using cutting edge digital resources, and all steps were confirmed by testing in climatic test and acoustic chambers.

The test center also enables CARRIER to offer its customers performance tests on manufactured products before they leave the facility in certain cases.

The painting, machining, panelwork, frame, fitting of gaskets, welding, and control tests are performed on production lines devoted entirely to the 39CP range.

The facility also produces air-water or refrigerant exchangers. Carrier uses its own calculating and sizing tools.

These factors give Carrier complete control of both its performances and its procurement cycles.

All of the above aspects combine to help create a high quality product which gives you complete satisfaction in a diverse range of applications from office and service sector administration to industrial processes and controlled environments in industry, and even the healthcare sector.



www.eurovent-certification.com

USE

The 39CP range is designed for the service sector, industry and healthcare to meet different requirements in terms of air mixing, filtration, heating, refrigeration, dehumidification, humidification, ventilation, recovery and sound attenuation. It is available as a horizontally-mounted version for installation indoors or outdoors with a roof and accessories to protect it from the weather. The range is available in a single or dual-flow version.

Thanks to the broad spectrum of solutions on offer, and the product's excellent modularity, the specifications for this product will always comply with the EN 13053 and EN 1886 standards, whatever its configuration.

39CP L: service sector applications



- Casing resistance: class D2
- Casing airtightness: class L1 (-400 Pa)/ L2 (+700 Pa)
- Thermal transmission: class T3
- Thermal bridging factor: class TB3
- Filter bypass: class F9

39CP H and 39CP C: all applications



- Casing resistance: class D1
- Casing airtightness: class L1
- Thermal transmission: class T2
- Thermal bridging factor: class TB1
- Filter bypass: class F9


RANGE

The 39CP segment 1 range consists of 9 sizes to handle air flow rates from 1000 to 30,000 m3/h.


The diagram below is used to pre-select the required size according to:

- The through speed in the front active section of the heat exchange coils
- The air flow rate to be handled.

Selection table

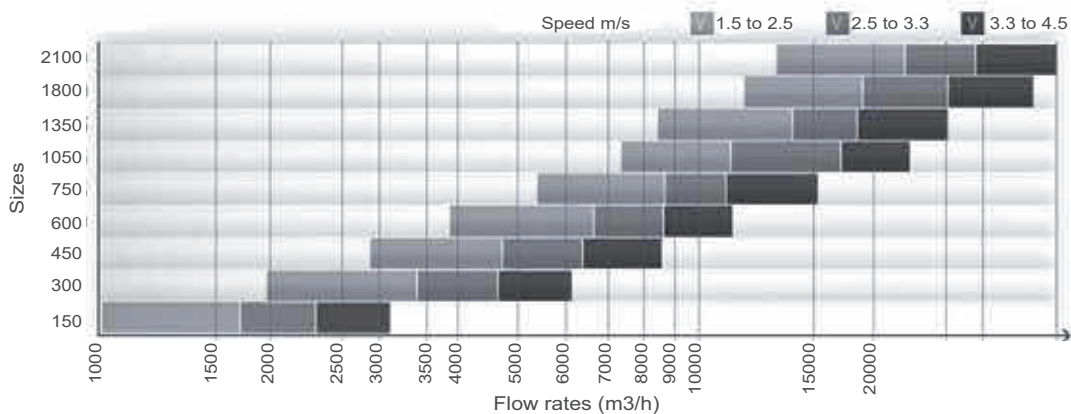

AHU sections (mm)

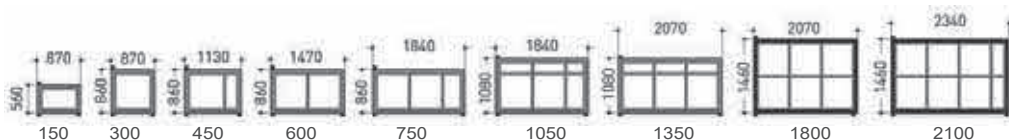

GENERAL DESCRIPTION OF THE 39CP RANGES

Casing

- Self-supporting panel construction up to size 2100
- Double-skin panels with 50 mm mineral wool insulation with long fibres with a high insulation coefficient.
- Moulded high strength bi-component polyurethane gaskets for the casing and door, guaranteeing a perfect seal.
- Inside of the AHU is perfectly smooth and even, with no protruding screws, as per the specifications in European standard EN 13053 (no internal handles).
- Doors hung on high quality frames, guaranteeing durability, performance and easy access for maintenance with adjustable hinges, external twist-lock handles and decompression system.
- AHUs delivered in several units are equipped with specific factory-fitted connective pieces, which ensure perfect alignment to simplify assembly.
- Each component unit of the AHU is equipped with an 80 mm ground insulation frame and multifunction ergonomic supports (handling, assembly).
- Each component is fitted with its own service panels. This allows independent removal for each function.

Standard:

39CP H

- Highly-insulated panels, with thermal bridge break profiles
- External wall made from sheet metal with RAL 7035 lacquer coating
- Internal wall made from Z275 galvanised steel

39CP C

- Highly-insulated panels, with thermal bridge break profiles
- External wall made from galvanised steel with RAL 9010 lacquer coating
- Internal wall made from galvanised steel with RAL 9010 lacquer coating

39CP L

- Conventional double-skin panels
- External wall made from sheet metal with RAL 7035 lacquer coating
- Internal wall made from Z275 galvanised steel

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Textured RAL 7035 paintwork on external panels	Standard	Standard	NA
Textured RAL 7035 paintwork on internal panels	X	X	NA
Smooth RAL 9010 paintwork on external panels	NA	X	Standard
Smooth RAL 9010 paintwork on internal panels	NA	X	Standard
Internal and/or external panels in 304 L or Z3CN 18.10 stainless steel	NA	X	X
Internal and/or external panels in 316 L or Z3CND 17.11.02 stainless steel	NA	X	X
Stainless steel base	X	X	X
Sloped stainless steel base with drain	NA	X	X
Galvanised ground insulation frame (h = 80mm)	Standard	Standard	Standard
Painted frame	X	X	X
Stainless steel frame	NA	X	X
Factory-assembled AHU on single unit frame: max size 1350 or maximum length 6 m	X	X	X
Container kit (for assembled air handling unit)	X	X	X
Adjustable support feet with 60 mm extension	X	X	X
Fixed extension feet up to 400 mm	X	X	X
Sloped roof to match external casing finish	X	X	X
Louvres with grilles to match external casing finish	X	X	X
Protective cover for external components to match external casing finish	X	X	X
Factory-fitted cable raceway	X	X	X
Lateral technical unit	NA	X	X
DIN 1946-4 hygienic option	NA	NA	X

X: Option NA: Not applicable

GENERAL DESCRIPTION OF THE 39CP RANGES

Mixing and air intakes

The air intakes and mixing section may be installed at the intake, inserted between the functions or installed at the device outlet.

These functions are equipped with dampers formed of counter-rotating profiled blades, with lateral gaskets, and driven by conrods.

These dampers are installed outside of or inside the casing, depending on the solution chosen.

Independent control of the louvres: manual, motorised or ready to be motorised

The functions provided depend on the selection:

- Isolation damper
- Two-way mixing with air intake
- Two-way flow distributions: top, front or lateral
- Three-way mixing: aligned, stacked or juxtaposed

Depending on the finishes:

39CP L

- Class 1 galvanised steel blades and frame as per EN1751

39CP H / 39CP C

- Class 3 aluminium blades and frame as per EN1751

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Servomotor	Kit	Kit	Kit
Manual control	X	X	X
Electrical heaters for warming the mechanisms <-25°C	X	X	X
Class 4 airtightness as per EN 1751	NA	X	X
Paintwork on damper	X	X	X
Stainless steel damper	NA	X	X
ATEX damper	NA	X	X
Safety container with stainless steel panel and drain	X	X	X
Hinged access door	X*	X*	X*
Removable access door	X	X*	X*
Porthole on door	X	X	X
Lighting	X	X	X
Door contact	NA	X	X

* Availability depends on the configuration

X: Option

NA: Not applicable

GENERAL DESCRIPTION OF THE 39CP RANGES

Filters

To meet the requirements of all the applications, a very wide range of filter efficiencies, technologies and dimensions is available.

Across the entire range, and for each type of filter, cells with international dimensions of 24" x 24" and 12" x 24" are available.

On sizes 150 to 1350, compact filters which are 50mm thick are available in full section (FS) to optimise energy consumption.

Different types of filter assembly are available, depending on the efficiency level, technology and location within the AHU.

There are 6 specific assembly systems:

Assembly A available for filters with international dimensions and **Assembly A FS** for filters with a full section

- Traditional tracks designed for efficiency levels G1 to M6:
For Compact cells, 50 mm thick, side door

Assembly B available for filters with international dimensions and **Assembly B FS** for filters with a full section

- Compressible tracks designed for efficiency levels G4 to F9 or Activated Carbon (urban pollution) for Compact cells and flexible or rigid bag with side door.

Assembly C for filters with international dimensions:

- Universal frames designed for efficiency levels G4 to F9, E10 or Activated Carbon (urban pollution) for Compact cells and flexible or rigid bag with access section and side door

Assembly D for Absolute filters with international dimensions

- Absolute large-media frames for EPA and HEPA Absolute cubic cells

Assembly ED for Absolute filters with international dimensions

- Absolute plate for EPA and HEPA Absolute cubic cells for industrial applications (e.g. pharmaceuticals).

Assembly F for Cubic carbon filters with international dimensions

- Large-media frames for Activated Carbon cubic cells.

Description	Construction Code	Assembly	Efficiency	Cell descriptive code
50mm flat metal filter	C	A or C	G1	Galvanised steel metal medium and frame
50mm flat filter	C	A, B or C	G4	Galvanised steel metal frame and synthetic medium
			M5	
			M6	
			F7	
50mm flat filter (full section) up to size 1350	C FS	A FS or B FS	G4	Galvanised steel metal frame and synthetic medium
			M5	
			M6	
			F7	
292mm rigid bag filter	RB	B or C	M6	Polypropylene frame and fibreglass medium
			F7	
			F8	
			F9	
380mm short flexible bag filter	SB	B or C	G4	Galvanised steel metal frame and synthetic medium
			M5	
			M6	
			F7	
600mm long flexible bag filter	LB	B or C	M6	Galvanised steel metal frame and synthetic medium
			F7	
			F9	
292mm Absolute filter	CUBIC 610x610	D	E10	Polypropylene frame and fibreglass medium
			H13	
			H14	
292 mm rigid bag carbon filter + fine filter, std universal frame	RB	B or C	Carbon+F7	Polypropylene frame, synthetic + carbon medium
Flexible carbon bag filter + 600mm long bag fine filter	LB	B or C	Carbon + F7	ABS frame, synthetic + carbon medium
292mm rigid bag carbon filter	RB	B or C	Carbon	Carbon polypropylene frame
Cubic carbon filter	CUBIC 595x595	F	Carbon	Metal frame + carbon panel

C: 50 mm compact filter
 C FS: 50 mm compact filter, full section
 RB: 290mm rigid bag filter
 SB: 380mm short flexible bag filter
 LB: 600 mm long flexible bag filter
 CUBIC: 292 mm cubic

GENERAL DESCRIPTION OF THE 39CP RANGES

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Removable door	Standard	Standard	Standard
Hinged doors	Standard	Standard	Standard
Pressure tapping per filter stage	Standard	Standard	Standard
Spare cell	X	X	X
Galvanised safety container	X	X	X
Stainless steel safety container	X	X	X
Liquid-filled pressure gauge in Kit form	X	X	X
Contact pressure gauge	X	X	X
Magnehelic pressure gauge in Kit form	X	X	X
Magnehelic pressure gauge fitted	X	X	X
Double glass porthole	X	X	X
Lighting not connected	X	X	X
Lighting connected on switch	X	X	X
Door contact	X	X	X
Paint on tracks	X	X	Standard
Paint on frame	X	X	Standard
304 L or 316 L stainless steel tracks	X	X	X
Stainless steel universal frame (fine filters •F")	X	X	X
Painted large-media frame (EPA/HEPA filters)	X	X	Standard
Stainless steel large-media frame (HEPA filters •H")	X	X	X
Orifice for DOP injection / Hatch for DOP measurement	NA	X	X
Range of ATEX filter cells	NA	X	X

X: Option

NA: Not applicable

Plate recovery unit

Three efficiency levels available: from 60% to 85%

The plate heat exchangers are always equipped with a total bypass on fresh air and access door to the servomotor

Condensate drain pan on exhaust air side, made from galvanised steel with condensate drain piping as standard

Available in a stacked configuration for all sizes

Access door to the condensate drain pan(s)

In the standard construction, the heat exchanger has aluminium plates, and can be used routinely up to an air temperature of 90°C (if the plate heat exchanger is a component of an AHU, the standard limit temperature is 80°C). The leakage flow rate is 0.1%, the nominal flow rate for a pressure difference of 400 Pa between the 2 air streams.

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Pre-painted aluminium plates	X	X	X
Condensate drain pan (exhaust air side) made from stainless steel panels	X	X	X
Condensate drain pan (fresh air side) made from galvanised panels	X	X	X
Condensate drain pan (fresh air side) made from stainless steel panels	X	X	X
Paint on baffle, partition and support	X	X	X
Baffle, partition and support made from 304 L or 316 L stainless steel	NA	X	X
Paintwork on bypass damper	X	X	X
Frame and bypass dampers in stainless steel	NA	X	X
Damper control, manual, motorised or ready to be motorised	X	X	X
Fresh air & exhaust air pressure tapping	Standard	Standard	Standard
Additional access door	X	X	X
Door porthole	x	x	x

X: Option

NA: Not applicable General description of the 39CP ranges

GENERAL DESCRIPTION OF THE 39CP RANGES

Rotary recovery

Two efficiency levels available: from 75% to 85%

- Corrugated aluminium exchange medium
- Adjustable midway and peripheral gasket to guarantee a minimum leak flow rate
- Lateral inspection panel

- Constant speed gear motor (230 / 400 V three-phase power supply)
- Maintenance-free ball bearing
- For sensible power exchange as standard.

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Gear motor and variable frequency drive for variable speeds from 0 to 10 rpm – 230 V single-phase	X	X	X
Coated aluminium rotor	X	X	X
Hygroscopic rotor (for humidity exchange)	X	X	X
Enthalpic rotor (for total power exchange)	X	X	X
Pool bearing and condensate drain pan	NA	X	X
316 stainless steel with drain	NA	X	X
Painted internal panelling	NA	X	X
304 L or 316 L stainless steel interior panelling	NA	X	X
Pressure tapping on the 4 air handling orifices	X	X	X
Purge sector	X	X	X
Door porthole	X	X	X

X: Option

NA: Not applicable

Heating coil

Fluids:

- Hot water
 - Construction with copper tubes and aluminium fins.
 - Maximum primary fluid temperature = 120 °C.
 - Operating pressure for water: 8 bar as standard - Higher pressures on consultation.
 - Removable sealing flanges between the casing and manifolds (up to 3" diameter prevent damage to the sealing system during connection operations).

Depending on the type of coil and the diameters required, the manifolds and supply tubes are:

- Copper tubes with unions up to a diam. of 2"1/2.
- Grooved steel tubes for larger diameters.

- Superheated water
 - Construction with steel tubes and aluminium fins.
 - Maximum primary fluid temperature = 200 °C.
 - Operating pressure for water: 30 bar max.
 - Supply manifolds and tubes made from steel with smooth ends.
- Refrigerant condensation
 - Construction with copper tubes and aluminium fins.
 - Supply tubes made from copper with smooth ends.
- Steam
 - Max pressure 2 to 8 bar - stainless steel tubes, aluminium fins.
 - Manifolds and supply tubes are stainless steel tubes with smooth ends

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Smooth pipe coil (without fins)	X	X	X
Superheated water coil	X	X	X
Steam coil	X	X	X
Condensation coil	X	X	X
Pressure tapping, upstream and downstream	X	X	X
Precoated fins/ max. primary fluid temperature 110°C	X	X	X
Stainless steel tubes on consultation, for water	X	X	X
Coil with ALTENA treatment, max. temperature 160°C	X	X	X
Coil with BLYGOLD treatment, max. temperature 90°C	X	X	X
Coil with HERESITE treatment, max. temperature 180°C	X	X	X
Copper fins	X	X	X
Paint on tracks	X	X	X
304 L or 316 L stainless steel tracks	X	X	X
304 L or 316 L stainless steel coil panelling	X	X	X
Standard screw flanges	Kit	Kit	Kit
Stainless steel screw flanges	Kit	Kit	Kit
Quick connections kit (copper tubes) (victaulic type)	Kit	Kit	Kit
Threaded connections (steel tubes)	Kit	Kit	Kit
Frost protection sensor slide	X	X	X
Frost protection thermostat with automatic reset supplied in kit form	X	X	X
Frost protection thermostat with automatic reset supplied assembled	X	X	X

X: Option

NA: Not applicable

GENERAL DESCRIPTION OF THE 39CP RANGES

Electric heater

- Shielded resistors in stainless steel scrolled finned tubes
- Connected to copper strips.
- Double insulation assembly.
- The electric heater is equipped with two safety thermostats. The first has a manual reset, the second has an automatic

reset.

- To commission the heater: refer to the manual supplied with each unit.

- Take the necessary measures to prevent abnormal overheating when the fan is switched off (fan delay).

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Paint on tracks	X	X	X
304 L or 316 L stainless steel tracks	X	X	X
304 L or 316 L stainless steel coil panelling	X	X	X
Single- or three-phase connection	X	X	X

X: Option

NA: Not applicable

Cooling coil

Fluids:

- Chilled water
 - Construction with copper tubes and aluminium fins.
 - Operating pressure for water: 8 bar as standard - Higher pressures on consultation.
 - Inclined condensate drain pan with drain pipes to be connected to a siphon on site.
 - Droplet separator as standard if necessary, as an option on request.
 - Removable sealing flanges between the casing and manifolds up to 3" diameter, preventing damage to the sealing system during connection operations.

Depending on the type of coil and the diameters required, the manifolds and supply tubes are:

- Copper tubes with unions up to a diam. of 2"1/2.
- Grooved steel tubes for larger diameters.
- Direct expansion evaporation
 - Construction with copper tubes and aluminium fins.
 - Inclined condensate drain pan with drain pipes to be connected to a siphon on site.
 - Droplet separator as standard if necessary, as an option on request.
 - Standard smooth copper refrigerant supply tubes (supplied capped)
 - Manifold on fluid intake as standard.

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Chilled water coil	X	X	X
Direct expansion evaporation coil	X	X	X
Access panel on droplet separator	as standard if compulsory		
Precoated fins/ max. primary fluid temperature 110°C	X	X	X
Stainless steel tubes on consultation, for water	X	X	X
Copper fins	X	X	X
Coil with ALTENA treatment, max. temperature 160°C	X	X	X
Coil with BLYGOLD treatment, max. temperature 90°C	X	X	X
Coil with HERESITE treatment, max. temperature 180°C	X	X	X
Paint on tracks	X	X	X
Stainless steel tracks	X	X	X
304 L or 316 L stainless steel coil panelling	X	X	X
316 L stainless steel condensate drain pan	X	X	X
316L stainless steel hygienic tank	NA	X	X
Standard tray insulation	X	X	X
Manifold insulation	X	X	X
All stainless steel droplet separator (frame and medium)	X	X	X
Polypropylene blade separator, galvanised frame	X	X	X
Polypropylene blade separator, stainless steel frame	NA	X	X
Aluminium blade separator, galvanised frame	NA	X	X
Aluminium blade separator, stainless steel frame	NA	X	X
Pressure tapping, upstream and downstream	X	X	X
Standard screw flanges	Kit	Kit	Kit
Stainless steel screw flanges	Kit	Kit	Kit
Tubes with quick connections (copper tubes) (victaulic type)	Kit	Kit	Kit
Threaded connections (steel tubes)	Kit	Kit	Kit
Frost protection sensor slide	X	X	X

X: Option

NA: Not applicable

GENERAL DESCRIPTION OF THE 39CP RANGES

Fans

- Forward-curved dual-inlet fan.
- Backward-curved dual-inlet fan.
- Steel scroll and impeller.
Belt and pulley transmission on the dual-inlet fans.
Assembly on anti-vibration frame with flexible internal sleeve and damper mounts.
- Metal impeller plug fan turbine with AC motor
Assembly on anti-vibration frame with flexible internal sleeve and damper mounts.
- Standard motor: asynchronous three-phase, 230 / 400 V
- 50 Hz up to 3 kW - 400 V - 50 Hz from 4 kW, IP 55 protection, class F with PTC
- Steel plug fan with EC motor with integrated variator, three-phase 400 V n- 50 Hz
- Assembly on partition.
- Inspection hatch with bolts in compliance with the "MECHANICAL SAFETY" specification in the EN 1886 standard and the machinery directive.

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Fan with forward-curved blades and transmission	X	X	X
Fan with backward-curved blades and transmission	X	X	X
Plug fan	X	X	X
EC plug fan	X	X	X
ATEX fan	NA	X	X
Removable door	X	X	X
Hinged door	Standard	Standard	Standard
Pressure tappings	X	X	X
Door contact	X	X	X
Double glass porthole	X	X	X
Smoke detector (NF S61961)	X	X	X
Lighting not connected	X	X	X
Lighting connected on switch	X	X	X
Paint protection on fan assembly (scroll and AC motor plug fan)	X	X	X
Frame, stainless steel smoke detector (scroll and AC motor plug fan)	NA	X	X
Epoxy painted scroll and impeller	NA	X	X
Screens on inlets	X	X	X
Access protected by screen	X	X	X
Belt housing	X	X	X
2 motors fitted on request	X	X	X
Hoist	X	X	X
Variable drive in kit form	X	X	X
Variable drive assembled	X	X	X
Proximity switch connected	X	X	X
Proximity switch in kit form	X	X	X
Discharge damper on scroll	X	X	X

X: Option

NA: Not applicable

Sound attenuator

- Different lengths of baffle depending on the required attenuation.
- Mineral wool of different densities, the faces are covered with an anti-erosion shield.
- Galvanised panels.

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Baffle lengths (in mm)	600 - 900 - 1200 - 1500		
Coating with fray-resistant fabric	NA	X	X
Protective paint on tracks	X	X	X
Painted baffle panels	X	X	X
304 L or 316 L stainless steel tracks	X	X	X
Earth strip on baffle (ATEX)	NA	X	X

X: Option

NA: Not applicable

GENERAL DESCRIPTION OF THE 39CP RANGES

Standalone production steam humidifier

With steam production (standalone with electrodes)

The supply includes

- Aluminium steam distributor.
- Steamer with electrical cabinet and controller (IP20).
- Proportional or on/off control.

- Duct/cylinder connection.

- Condensate return tubes and connections.
- Three-phase 400 V - 415 V supply voltage depending on capacity
- Min and max supply water conductivity limits 125 - 1250 microsiemens/cm (8000 - 800 ohm).
- Hardness of supply water 15 - 30 degrees (French).

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Stainless steel safety container	X	X	X
Fully galvanised droplet separator	X	X	X
Fully stainless steel droplet separator	X	X	X
Double glass porthole	X	X	X
Lighting connected on switch	X	X	X
Removable door	X	X	X
Door contact	X	X	X

X: Option

NA: Not applicable

Control

The electrics box is integrated into the unit and the electrical cables are protected by an enclosed cable raceway, factory-fitted.

The unit can be supplied as a single unit, equipped with a control which is fully assembled and tested in the factory if it is formed of one block, or a multi-block assembled on the optional multi-block frame.

Plug & Play solution: the electrics box is powered by a 400 V + earth power supply

The control software for the 39CP range enables the following:

- Temperature regulation*: sensor on supply air / return air / room air
- Humidification and dehumidification regulation*: sensor on return or room air
- Fan management: constant flow / constant pressure
- Filter fouling management (4-stage filtration as maximum)
- Single-zone air quality management (CO₂) sensor on return air or room air
- Water coils: cooling/heating/mixed/direct expansion (3 maximum)
 - 2-way valve
 - Three-way valve.

- Electric heater (4-stage heaters as maximum)

- Proportional and On/Off control
- 1 TRIAC type proportional stage (compulsory)
- Independent power supply, control by the AHU PLC.

- Steam humidifier with electrode:

- Independent power supply, control by the AHU PLC.

- Management of cooling modes: Free cooling / Night cooling

- Management of frost protection faults

- Fire protection

- Communication board available:

- Modbus RTU RS485 / Modbus TCP IP / KNX / LON / BACNET IP

The control does not enable the following elements to be managed:

- Steam coil / Superheated water coil / Glycol/water mix coils / Condenser coil
- Make-up / GGS
- Adiabatic humidifier

* availability depends on options; see specific control document

Extra accessories:

OPTIONS AVAILABLE PER RANGE	39CP L	39CP H	39CP C
Standard flexible sleeves for the outside of the casing	X	X	X
Insulated flexible sleeves for the outside of the casing	X	X	X
Rain protection frame with bird screen	X	X	X
Grille frame for protection of the air handling orifices on AHUs	X	X	X
Factory-assembled AHU on single unit frame: max size 1350 or maximum length 6 m	X	X	X


X: Option

NA: Not applicable

DIMENSIONS

External dimensions and raceway details*


* raceway optional

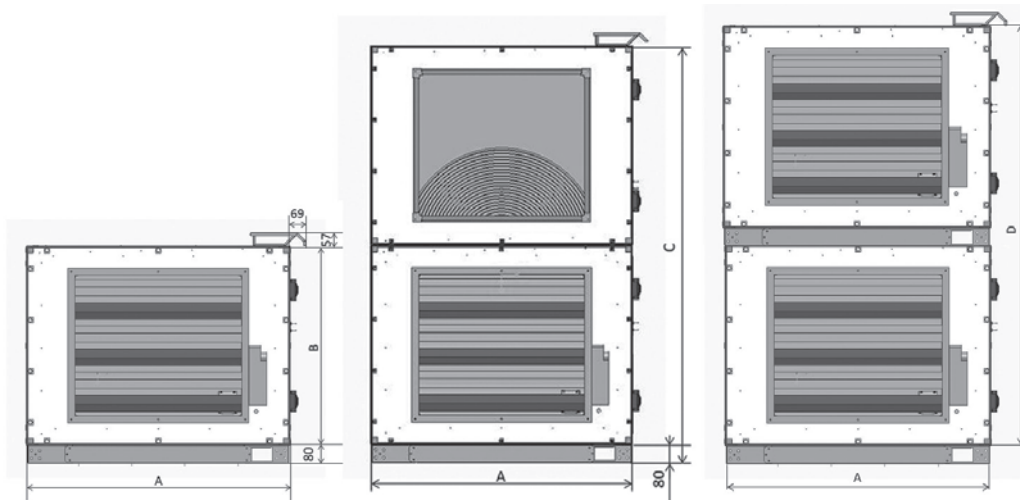

Sizes	Casing external dimension				Block length*
	A	B	C	D	
150	870	560	1122		250 < L < 2800
300	870	860	1722		250 < L < 2800
450	1130	860	1722		250 < L < 2800
600	1470	860	1722		250 < L < 2800
750	1840	860	1722		250 < L < 2800
1050	1840	1080	2162		250 < L < 2800
1350	2070	1080	2162		250 < L < 2800
1800	2070	1460		3000	250 < L < 2800
2100	2340	1460		3000	250 < L < 2300

*Length excluding the unit end panel

Connection flanges

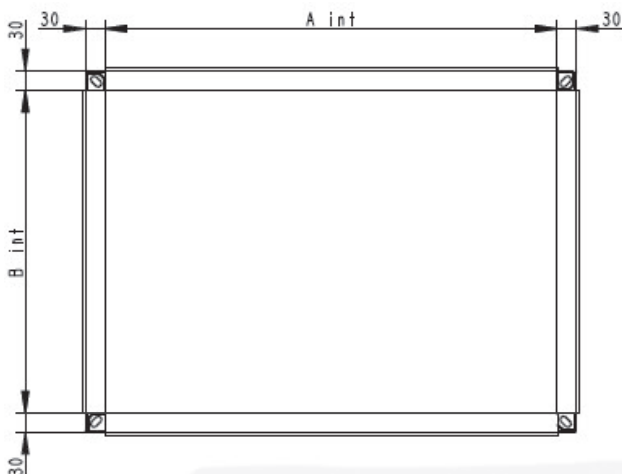

- Reference 00: Lateral air intake
- Reference 1: Air intake, small section
- Reference 2: Air intake, large section
- Reference 3: Scroll fan discharge air intake

39CP L		5	10	15	20	25	35	45	60	70
39CP H										
39CP C										
Reference 00 - LATERAL	A	320	320	470	620	720	770	970	870	970
	B	370	670	670	670	670	870	870	1270	1270
Reference 1 - SMALL SECTION	A	515	515	775	1115	1485	1485	1715	1715	1985
	B	220	370	370	370	370	470	470	670	670
Reference 2 - LARGE SECTION	A	515	515	775	1115	1485	1485	1715	1715	1985
	B	370	670	670	670	670	870	870	1270	1270
Reference 3: FAN DISCHARGE	A	-	520	520	520	520	620	620	920	920
	B	-	520	520	520	520	620	620	920	920